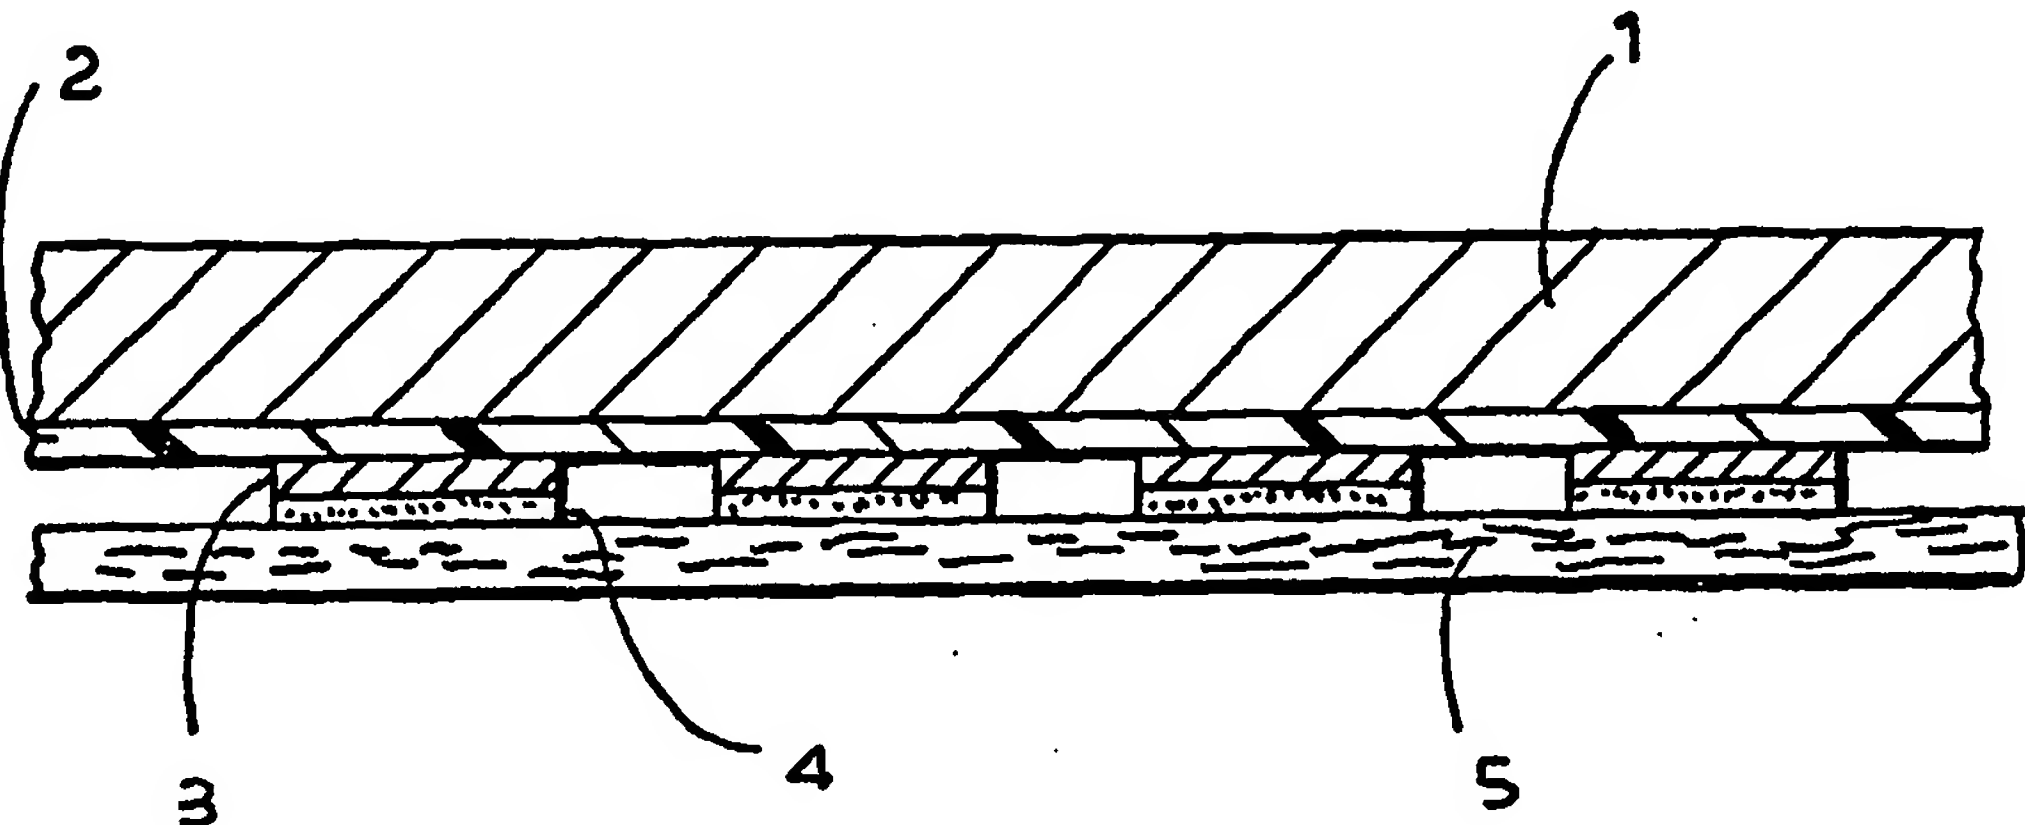


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G03G 13/14, B32B 15/04, 7/12	A1	(11) International Publication Number: WO 00/46644 (43) International Publication Date: 10 August 2000 (10.08.00)
(21) International Application Number: PCT/US00/02416 (22) International Filing Date: 31 January 2000 (31.01.00) (30) Priority Data: 09/244,631 4 February 1999 (04.02.99) US (71) Applicant: CHARTPAK, INC. [US/US]; One River Road, Leeds, MA 01053 (US). (72) Inventor: DE BASTIANI, Norman, P.; 120 Mosler Street, So. Hadley, MA 01075 (US). (74) Agent: SCHWEITZER, Fritz, L., Jr.; Schweitzer Commman Gross & Bondell LLP, Suite 2200, 203 Park Avenue, New York, NY 10169 (US).		(81) Designated States: CN, ID, IN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: MANUFACTURE OF TRANSFER DECALCOMANIAS USING ULTRAVIOLET CURE INK AND ADHESIVE TECHNOLOGY  (57) Abstract Conventional methods of manufacture of transfer decalcomanias utilizing traditional solvent evaporative ink and adhesive technology are replaced by the present process utilizing ultraviolet (U.V.) cure inks and adhesive technology to produce a better product in a simpler, less costly manufacturing operation.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MANUFACTURE OF TRANSFER DECALCOMANIAS USING
ULTRAVIOLET CURE INK AND ADHESIVE TECHNOLOGY

BACKGROUND OF THE INVENTION

Dry transfer products (typically referred to as
5 decalcomanias) are well known in the art. Such products
are composed of a carrier film screen printed with graph-
ic designs i.e., lettering, craft art, logos, tole paint-
ing, signage, symbols, etc., and subsequently adhesived
and protected with a silicone coated release paper. The
10 decalcomania is transferred to the intended receiving
surface by removing the protective silicone coated re-
lease paper and positioning the decalcomania with the
adhesive side against the receiving surface and contact-
ing the adhesive by burnishing the carrier film on the
15 opposite side and slowly peeling away the carrier film
leaving only the screen ink formed decalcomania attached
to the receiving surface.

Decalcomanias are presently manufactured using
solvent based screen inks and adhesives.

20 An example of the above described prior art process
is exemplified by U.S. Patent 3,847,725 wherein use of a
carrier film, solvent base ink and adhesives are taught.
This patent describes a single color decalcomania whereas
it also applies to spot and halftone screen printing.

-2-

U.S. Patent 3,847,725 describes a carrier film coated with a non-extensible highly cross-linked polymeric coating that is insoluble to organic solvents; a solvent/resin evaporative ink and a solvent/elastomeric low tack solvent evaporative pressure sensitive adhesive.

In summary all previously described art teaches a carrier film with a no-stick surface coating, a solvent evaporative ink that will release from the no-stick surface and a solvent evaporative pressure sensitive adhesive that will aid transfer and bond the indica to the receiving surface.

Such processes necessarily require special efforts and compliance to OSHA and DEP regulations when handling solvent base inks and adhesives. For example, OSHA requires proper labeling and handling for employee health and accident safety and DEP requires special permitting and annual reporting of the solvent emissions, called , volatile organic compounds or (VOC's). If emissions exceed "low quantity generator status" an expensive solvent oxidizer installation will be required to process the VOC's before discharging them to the atmosphere.

The present invention eliminates the following disadvantages of using solvent evaporative inks:

-3-

1. Atmosphere pollution from solvent VOC's.
2. Time consuming and complicated solvent emission reporting to the DEP.
3. Implementing and auditing OSHA required safety
5 procedures for solvent inks and adhesives.
4. Solvent evaporative ink tend to dry in the screens and require washing out every 100 - 500 sheets resulting in costly loss in production efficiency.
5. Cost of expensive drying ovens needed to evaporate the solvents out of the printed screen ink.
10
6. Drying ovens require valuable manufacturing floor space.
7. Inability to efficiently halftone screen print above 75 lines per inch resolution.
8. Cost of expensive oxidizer to treat the VOC
15 emissions prior to discharge into the atmosphere.

BRIEF DESCRIPTION OF THE PRESENT INVENTION

The present invention eliminates the need for solvent base screen inks and adhesives in the manufacture of
20 decalcomanias. Rather, this invention employs ultraviolet (U.V.) cure inks and adhesives in the manufacture of decalcomanias. U.V. curable inks produce decalcomanias with tougher ink films resulting in improved scuff and abrasion resistance. U.V. cure systems also increase

-4-

process speed and improve ability to print finer halftone screens (100-150 lines per inch resolution) because U.V. ink and adhesive will not dry in the screen.

U.V. screen inks and adhesives will also allow the
5 production of decalcomania in a less hazardous solvent free work place while protecting the environment by eliminating VOC's.

The decalcomania dry transfer product of the present invention comprises (see Fig. 1):

- 10 (1) a carrier film;
- (2) a non-stick coating applied to the carrier film;
- (3) a U.V. curable ink for producing the desired indicia which is ap-
15 plied to the non-stick coating;
- (4) a U.V. curable pressure-sensitive adhesive applied over the indicia formed in feature (3); and
- (5) a protective release paper or plas-
20 tic coating.

The key inventive features of the present invention reside primarily in features (3) and (4), and the elimination of the prior art solvent steps.

-5-

The present process is particularly suitable to produce a single color, spot color, halftone color or a combination of the above screen printing decalcomania, while eliminating the disadvantages of using solvent evaporating ink previously described.

BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a cross-section of a dry transfer sheet embodying the present invention and the foregoing elements (1) - (5) described above.

10 DETAILED DESCRIPTION

The present invention may be readily understood by referring to Figure 1 and amplifying each of the component elements of the present dry transfer sheet.

As depicted in Figure 1:

15 (1) is the base carrier film similar to those conventionally used, such as described in U.S. Patent 3,847,725 which description is incorporated by reference. The carrier film can be polyester, polyethylene, polystyrene, polypropylene, a vinyl polymer or the like. The

-6-

carrier paper can be densified Kraft paper, parchment, transparent paper, etc.

(2) denotes a polymeric coating applied to the carrier film.

5 The polymeric coating may be a polymer as described in col. 2 of U.S. Patent 3,847,725 which is incorporated by reference. Thermosetting polymers and especially thermosetting acrylics are particularly useful. Such polymers must be substantially non-extensible. A modified
10 silicone polymer coating may also be used next to the polymeric coating.

In either case to be useful, the ink release values from the polymeric coating should be between 2-5 grams per inch when measured as described by the pressure sensitive tape council's test method number PSTC#-1 and allow the U.V. cure screen ink to be printed to high printing standards and quality.
15

(3) denotes the decalcomania formed by use of U.V. inks according to the present invention. Such inks are
20 formulated from a blend of monomers, oligomers, photoinitiators, pigments, additives, modifiers and synergist.

-7-

When exposed to U.V. energy, in the 200 - 400 nanometer range for a fraction of a second, the photoinitiator will absorb U.V. energy, and start the polymerization of the oligomer and monomer until it is completely cross linked
5 changing the U.V. ink from a liquid to a 100% cured solid.

The proper selection of monomers and oligomers, etc. will give the cured U.v. ink the desired physical properties such as hardness, flexibility, clarity, color,
10 and releaseability from the carrier film.

1. Oligomers are the resin backbone part of the formula. Ebecryl #1755 is an acrylic oligomer blended with TRPGDA-DEO monomer featuring flexibility. Ebecryl #6700 is an acrylated aromatic urethane oligomer featuring
15 toughness and abrasion resistance. They are both manufactured by UCB Chemicals Corp., Smyra, Georgia.

2. Monomers crosslink with the oligomer resins to form a solid. They also act as diluents and contribute to the physical properties of the solid ink film.

20 Ebecryl TRPGDA is a tripropylene glycol diacrylate. It contributes flexibility, water resistance, low viscos-

-8-

ity, good cure speed, and good solvency for acrylated oligomers without imparting brittleness.

Ebecryl TRPGDA-DEO is a purified grade of tripropylene glycol diacrylate. It has the same physical properties as TRPGDA but exhibits low odor.

3. Photoinitiator can be called a catalyst. It starts the polymerization between the oligomer and the monomer. When radiated with U.V. light the photoinitiator will absorb U.V. energy and generate free radicals which cause the oligomer and monomer to crosslink into a solid polymerized ink film. Irgacure 907 and Irgacure 1700 are manufactured by Ciba Specialties Chemical Co., Tarrytown, NY.

4. Pigment is used to impart color to the U.V. crosslinked polymer ink film. Pennco #981 black and Pennco #9R52 red are pigment paste manufactured by Penn Color, Inc., Doylestown, PA.

5. Various Additives FL 430 is a surfactant manufactured by 3M Corp., St. Paul, MN. It reduces the surface tension of the ink and facilitates wetting of the pigments and receiving surfaces. L405 is a defoamer man-

-9-

ufactured by Drew Chemical Company (Division of Ashland Chemical Co.), Boonton, NJ. L405 is added to the ink to control fisheyes, cratering, etc. Cabosil #M-5 is a fumed silica added to flatten the gloss and improve viscosity. It is manufactured by the Cabot Corporation, Tuslola, IL. Ebecryl P115 is an amine synergist. It is an additive used to increase the cure speed of the U.V. ink and imparts low odor.

Component (4) of Figure 1 are U.V. pressure sensitive adhesives. Such adhesives can be purchased from various manufacturers. Two manufacturers are: RAD-CURE Corp., Fairfield, NJ (their product is #UV12PS-8K) and Acheson Colloids, Port Huron, MI (their product #ML2525-1).

(5) A protective release paper denoted as (5) is used to protect the adhesive and to prevent the indicia from pre-release or pre-transfer to an unwanted surface. This is a conventional feature. A paper such as vegetable parchment, tissue, or densified Kraft paper, is silicone coated to provide the protection.

The components making up the U.V. inks are exemplified as follows:

-10-

1. Oligomers and Additives - supplied
by UCB Chemicals Corp., Smyrna, GA
30080
EB 220, EB 745, EB 1701, EB 1710, EB 1755, EB
4827 and EB 1755.
2. Monomers - supplied by UCB Chemical
Corp. EB CL1039, HDODA, TRPGDA,
TRPGDA-DEO PETA.K.
3. Photoinitiators - supplied by UCB
Chemical Corp. EB P37, Irgacure
1700*, Irgacure 907*, Benzophenone,
EB P115, DVROCUR 1173*, supplied by
Ciba Corp.
4. Synergist - supplied by UCB Chemi-
cal Corp., EB P115, EB P104.
5. Pigments -
Pennco 981 Black Pigment paste*
Pennco 9R52 Red pigment paste*
Pennco 9579 blue pigment paste*
Pennco 9W7 white pigment paste *
* supplied by Penn Color Inc.
6. Additives -

-11-

FC-430 fluorocarbon surfactant, supplied by 3M Co.

Carnavba Wax, Slip Agent, supplied by F.B. Ross Co., Inc.

5 L-405 Defoamer, supplied by Drew Chemical Co.
Cabosil M-5 Fumed Silica, supplied by Cabot Corp.

DC-193 Silicone Wetting Agent, supplied by Dow Corning.

10 A typical formula for a black U.V. cure ink is as follows:

	<u>100 Parts by Weight</u>
Oligomer	EB 175547.0
Monomer	TRPGPA-DEO19.0
15 Pigment	PENNCO 98121.0
Photoinitiator	IRGACURE 1700 6.0
Surfactant	FC430 0.5
Defoamer	L405 0.5
Silica	Cabosil/M-5 1.0
20 Synergist	P115 5.0

A typical red U.V. Cure Ink is as follows:

Oligomer	6700 30.0
Monomer	TRPG-DA 26.0

-12-

Pigment 9R52 31.0

Photoinitiator IRGACURE 907 6.0

Surfactant, defoamer, silica and synergist are the same as to nature and quantity as the above U.V. cure ink
5 composition.

Additives and modifiers can be added to the inks and adhesives to provide flow, slip, hold out, viscosity, flexibility adjustments as deemed necessary.

U.V. cure ink and adhesive printing conditions are
10 the same as used for standard solvent base ink and adhesive printing which is in itself generally well known.

An illustrative description of the present process is as follows:

Printing Screen: Mesh for ink, 300-400 threads per
15 ink in either stainless steel or polyester material stretched to a minimum tension of 20-24 newtons.

A direct photo emulsion stencil depicting the graphics to be printed is firmly adhered and anchored to the mesh.

-13-

Press: Any standard flatbed or cylinder or web press capable of controlling registration, and squeegee speed and pressure.

U.V. Cure Process: A standard U.V. cure unit equipped with one or two 300 watt per inch mercury vapor lamps fitted with a standard elliptical reflector. Cure speed is normally in the range of 50 to 75 feet per minute with exposure to 200-400 monometers for a fraction of a second. For either U.V. cure ink and/or U.V. cure adhesive.

Various modifications may suggest themselves to those skilled in the art.

Having described the present invention, that which is sought to be protected is set forth in the following claims.

-14-

WHAT IS CLAIMED IS:

1. A dry transfer product comprising a carrier sheet, a coating applied to said sheet, an ink composition capable to form desired indicia and which is being
5 received by said coating in a solvent-free carrier, and which has been cured by the application of ultraviolet (U.V.) energy to fix the desired indicia in place, and a pressure sensitive adhesive applied to said U.V. cured indicia.
- 10 2. The product of claim 1, wherein the pressure sensitive adhesive is U.V. curable and thus does not require solvent to apply.
3. The product of claim 1, wherein said coating is selected from the group consisting of a thermosetting
15 polymer and a silicone coated polymer adapted to receive said U.V. curable ink composition.
4. The product of claim 1, wherein said ink composition contains a member of the group consisting of a monomer, oligomer, photoinitiator, additives, and pig-
20 ment.

-15-

5. The product of claim 4, wherein said ink composition comprises a monomer, oligomer and photoinitiator.

6. The dry transfer product of claim 1, which
5 contains on its outer surface a protective paper coated with a low friction medium to be readily removed therefrom.

7. The pressure sensitive adhesive of claim 2
which contains members of the group consisting of mono-
10 mers, oligomers, photoinitiators and modifiers.

8. The fixed desired indicia of claim 1 resulting from subjecting said ink composition to a wavelength of 200-400 nanometers of ultraviolet exposure.

9. The dry transfer product of claim 1, wherein
15 said ink composition comprises an acrylic oligomer and a tripropylene glycol diacrylate monomer.

10. The dry transfer product of claim 9, wherein said ink composition further comprises a photoinitiator for catalyzing the polymerization between said oligomer
20 and said monomer.

-16-


11. A process for producing a dry transfer product wherein a coating is applied to a carrier sheet and an ink composition capable of forming desired indicia is applied to said coating, the improvement which comprises
5 employing a solvent-free carrier and ink composition capable of being cured by the application of ultra violet (U.V.) energy to fix the desired indicia in place, exposing the resultant product to sufficient U.V. energy to effect curing, and then applying a pressure sensitive
10 adhesive to said U.V. cured indicia.

12. The process of claim 11 wherein the indicia and carrier are exposed to 200-400 monometers of U.V. energy to effect curing.

13. The process of claim 11 wherein the ink composition to be cured comprises an oligomer, monomer, photo-
15 initiator and a pigment.

14. The process of claim 13 wherein said oligomer is an acrylic and said monomer is a tripropylene glycol diacrylate.

FIG. 1

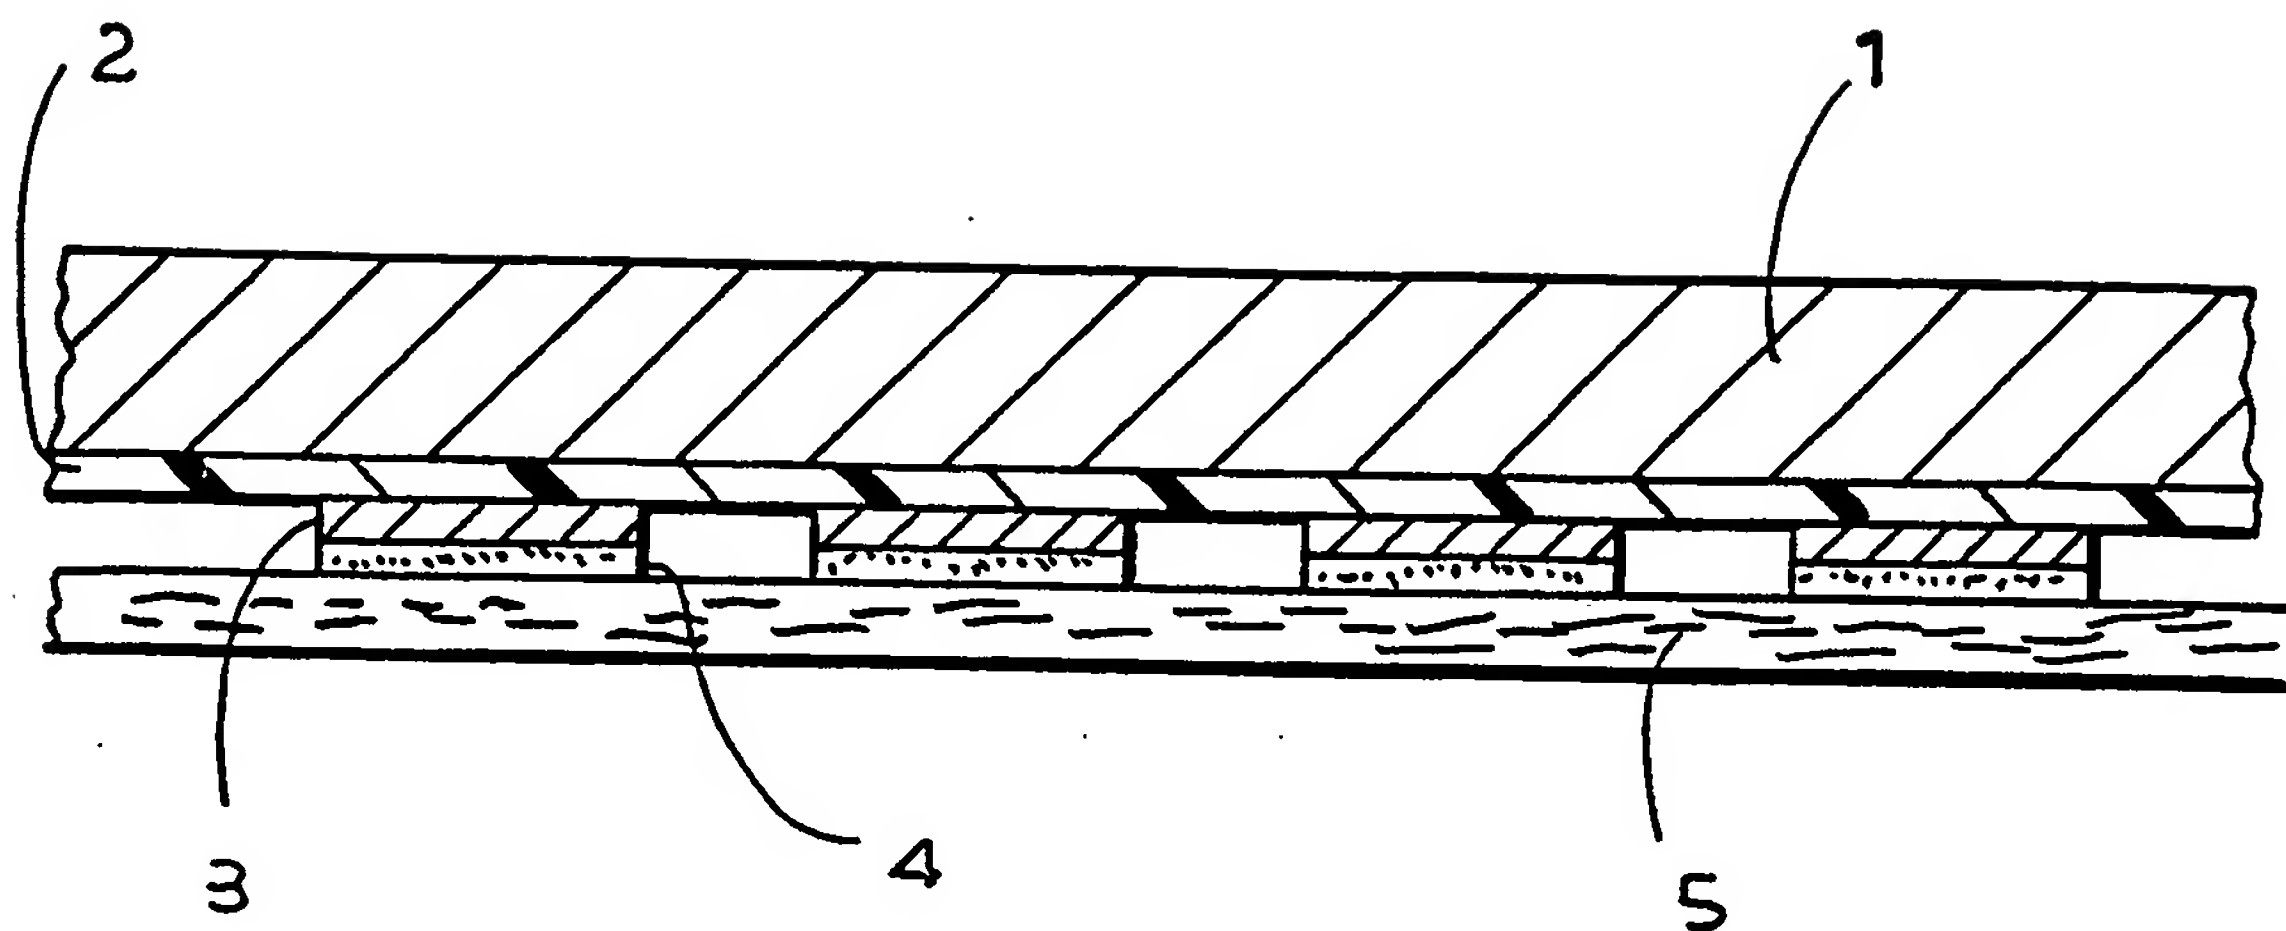

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/02416

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G03G 13/14; B32B 15/04, 7/12

US CL : 430/126; 428/352, 354

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 430/126; 428/352, 354

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,560,796 A (YOSHIMURA) 01 October 1996, col. 2, lines 20-25 and col. 3, lines 5-15.	1-14
Y	US 4,786,537 A (SASAKI) 22 November 1988, entire document.	1-14

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 APRIL 2000

Date of mailing of the international search report

02 MAY 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MARK A. CHAPMAN

Telephone No. (703) 308-0661